


REEL GM 400/127-286

07 General reels, 10 GM - reels

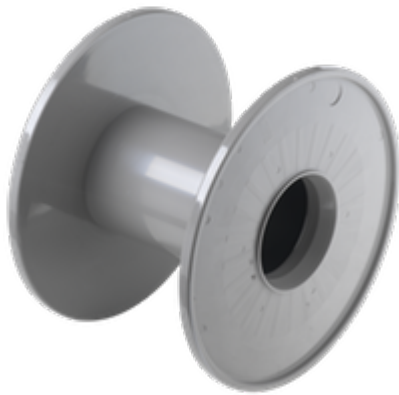

Reusable

Winding material : data cable, power cables, Extruded cables, Stranded wires

Material : ABS

Standard winding volume : 26389 cm³

Central bore Ø : 127 mm

Catalogue categorization: 07 , 10

DIN 46395

TECHNICAL DATA - SPOOLS

Spools

| Flange Ø | Barrel Ø | Central bore Ø | Width | Winding width | Flange thickness | Winding-volume | Central bore Ø tapered part | Drive-hole/pin | Drive-distance |
|----------|----------|----------------|---------|---------------|------------------|----------------------|-----------------------------|----------------|----------------|
| d1 [mm] | d2 [mm] | d3 [mm] | L1 [mm] | L2 [mm] | S [mm] | V [cm ³] | d4 [mm] | d5 [mm] | E1 [mm] |
| 400 | 160 | 16 - 127 | 286 | 50 - 250 | 18 | 5278 - 26389 | 143.5 | | |

PACKAGING

| Designation | Cardboard box | Cardboard box weight | Cardboard box Outside Deminsions | Pallets | Pallet weight | Pallet's external dimensions |
|-------------|---------------|----------------------|----------------------------------|---------|---------------|------------------------------|
| | | | | | | |

| Designation | Cardboard box | Cardboard box weight | Cardboard box Outside Deminsions | Pallets | Pallet weight | Pallet's external dimensions |
|-------------|---------------|----------------------|----------------------------------|---------|---------------|------------------------------|
|-------------|---------------|----------------------|----------------------------------|---------|---------------|------------------------------|

| | piece | kg | cm | piece | kg | cm |
|------------------------|-------|----|----|-------|-----|-------------|
| Reel GM 400/127-286 | - | - | | 72 | 330 | 100x120x192 |

Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

TECHNICAL DRAWING

Spools

