


REEL HKV 160

13 Fine wire reels, 24 Spools for photovoltaic ribbon/flat wire, 02 Spools with conical flanges

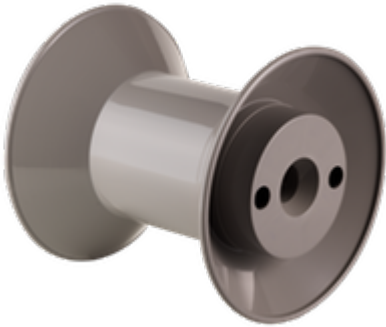

Reusable

Winding material : Stainless steel wires, Fine wires, Enamelled copper wire, Alloy wires

Material : ABS

Standard winding volume : 1675 cm³

Central bore Ø : 22 mm

Catalogue categorization: 13 , 24 , 02

DIN EN 60264-5-1 Cylindrically barrelled delivery spools and conical flanges - dimensions

DIN EN 60264-5-2 Cylindrically barrelled delivery spools and conical flanges - specification for reusable

TECHNICAL DATA - SPOOLS

Spools

Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding- volume	Central bore Ø tapered part	Drive- hole/pin	Drive- distance
d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm ³]	d4 [mm]	d5 [mm]	E1 [mm]
160	90	16 - 22	160	85	37.5	1675	34	2x13	32

Container

Designation	Outer Ø	Overall height	Inner Ø bottom	Inner Ø top	
	d1 max	h1 max	d2	d3	h2 min
Container VD 160	169	167	-	-	-

PACKAGING

Designation	Cardboard box	Cardboard box weight	Cardboard box Outside Deminsions	Pallets	Pallet weight	Pallet's external dimensions
	piece	kg	cm	piece	kg	cm
Reel HKV 160	80	27.5	66x54x67	490	168	80x120x178
Container VD 160	42	11.0	80x54x52	-	-	

Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

TECHNICAL DRAWING

Spools

Container

