

## REEL K 250/36 WITH RADIUS

19 Reels and reel containers, 04 Cylindrically barrelled delivery spools



Reusable

Winding material : Stainless steel wires, Alloy wires, Steel cord, monofilaments

Standard winding volume : 4637 cm<sup>3</sup>

Central bore Ø : 36 mm

Catalogue categorization: 19 , 04

DIN EN 60264-2-1 Cylindrically barrelled delivery spools - Dimensions

## TECHNICAL DATA - SPOOLS

### Spools

| Flange Ø | Barrel Ø | Central bore Ø | Width   | Winding width | Flange thickness | Winding-<br>volume   | Central bore Ø<br>tapered part | Drive-<br>hole/pin | Drive-<br>distance |
|----------|----------|----------------|---------|---------------|------------------|----------------------|--------------------------------|--------------------|--------------------|
| d1 [mm]  | d2 [mm]  | d3 [mm]        | L1 [mm] | L2 [mm]       | S [mm]           | V [cm <sup>3</sup> ] | d4 [mm]                        | d5 [mm]            | E1 [mm]            |
| 250      | 160      | 30 - 36        | 200     | 160           | 20               | 4637                 |                                |                    |                    |

### Container

| Designation         | Outer Ø | Overall height | Inner Ø bottom | Inner Ø top |        |
|---------------------|---------|----------------|----------------|-------------|--------|
|                     | d1 max  | h1 max         | d2             | d3          | h2 min |
| Container VB 250/36 | 304     | 273            | -              | -           | -      |

## PACKAGING


| Designation               | Cardboard box | Cardboard box weight | Cardboard box Outside Deminsions | Pallets | Pallet weight | Pallet's external dimensions |
|---------------------------|---------------|----------------------|----------------------------------|---------|---------------|------------------------------|
|                           | piece         | kg                   | cm                               | piece   | kg            | cm                           |
| Reel K 250/36 with radius | 18            | 26                   | 68x44x71                         | 240     | 333           | 106x129x177                  |
| Container VB 250/36       | 0             | 0                    |                                  | 96      | 155           | 112x120x188                  |

### Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

## TECHNICAL DRAWING

### Spools

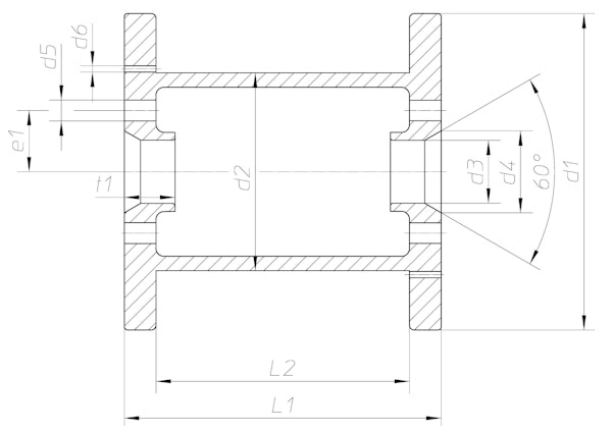

### Container

