

## REEL 258/322

19 Reels and reel containers



Single-use

Winding material : Enamelled copper wire

Material : PS, ABS

Standard winding volume : 6728 cm<sup>3</sup>

Central bore Ø : 100 mm

Catalogue categorization: 19

## TECHNICAL DATA - SPOOLS

### Spools

| Flange Ø | Barrel Ø | Central bore Ø | Width   | Winding width | Flange thickness | Winding-volume       | Central bore Ø tapered part | Drive-hole/pin | Drive-distance |
|----------|----------|----------------|---------|---------------|------------------|----------------------|-----------------------------|----------------|----------------|
| d1 [mm]  | d2 [mm]  | d3 [mm]        | L1 [mm] | L2 [mm]       | S [mm]           | V [cm <sup>3</sup> ] | d4 [mm]                     | d5 [mm]        | E1 [mm]        |
| 258      | 160      | 30.5 - 100     | 322     | 280           | 21               | 6728                 |                             |                |                |

### Container

| Designation          | Outer Ø | Overall height | Inner Ø bottom | Inner Ø top |        |
|----------------------|---------|----------------|----------------|-------------|--------|
|                      | d1 max  | h1 max         | d2             | d3          | h2 min |
| Container VB 250/400 | 315     | 500            | 270            | 280         | 50     |

## PACKAGING


| Designation          | Cardboard box | Cardboard box weight | Cardboard box Outside Deminsions | Pallets | Pallet weight | Pallet's external dimensions |
|----------------------|---------------|----------------------|----------------------------------|---------|---------------|------------------------------|
|                      | piece         | kg                   | cm                               | piece   | kg            | cm                           |
| Reel 258/322         | 10            | 12                   | 68x44x71                         | 120     | 124           | 100x126x207                  |
| Container VB 250/400 | 0             | 0                    |                                  | 64      | 169           | 112x120x206                  |

**Important:**

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

## TECHNICAL DRAWING

## Spools

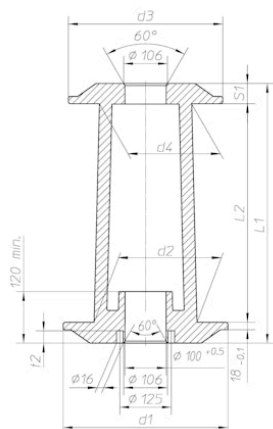

## Container

