

REEL HKV 125

13 Fine wire reels, 02 Spools with conical flanges, 24 Spools for photovoltaic ribbon/flat wire



Reusable

Winding material : Stainless steel wires, Enamelled copper wire, Metal strip, metal tape, Dental floss

Material : ABS

Standard winding volume : 767 cm³

Central bore Ø : 16 mm

Catalogue categorization: 13 , 02 , 24

DIN EN 60264-5-1 Cylindrically barrelled delivery spools and conical flanges - dimensions

DIN EN 60264-5-2 Cylindrically barrelled delivery spools and conical flanges - specification for reusable

TECHNICAL DATA - SPOOLS

Spools

Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding-volume	Central bore Ø tapered part	Drive-hole/pin	Drive-distance
d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm ³]	d4 [mm]	d5 [mm]	E1 [mm]
125	71	16	125	65	30	767	24	2x7	20

Container

Designation	Outer Ø	Overall height	Inner Ø bottom	Inner Ø top	
	d1 max	h1 max	d2	d3	h2 min
Container VD 125	133	132	-	-	-

PACKAGING


Designation	Cardboard box	Cardboard box weight	Cardboard box Outside Deminsions	Pallets	Pallet weight	Pallet's external dimensions
	piece	kg	cm	piece	kg	cm
Reel HKV 125	72	12.7	52x52x45	1080	200	80x120x168
Container VD 125	95	12.9	66x54x67	0	0	

Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

TECHNICAL DRAWING

Spools

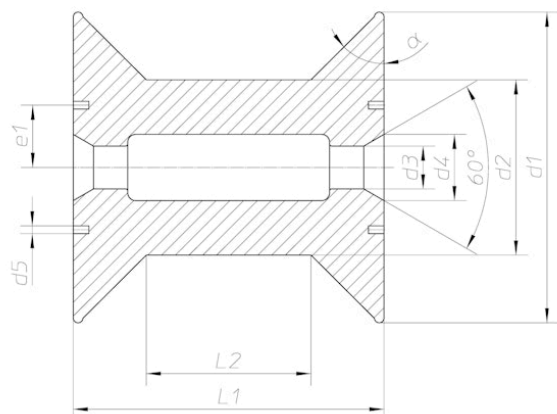

Container

