


REEL K 250/102 WITH RADIUS

04 Cylindrically barrelled delivery spools

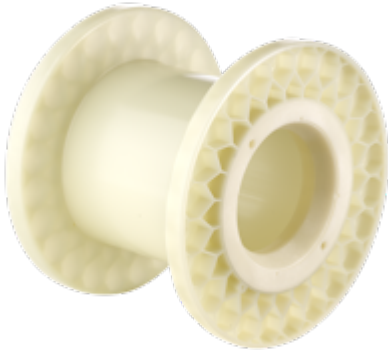

Reusable

Winding material : bare wires, Stainless steel wires, Spring wire, Alloy wires

Standard winding volume : 4637 cm³

Central bore Ø : 102 mm

Catalogue categorization: 04

DIN EN 60264-2-1 Cylindrically barrelled delivery spools - Dimensions

TECHNICAL DATA - SPOOLS

Spools

Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding- volume	Central bore Ø tapered part	Drive- hole/pin	Drive- distance
d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm ³]	d4 [mm]	d5 [mm]	E1 [mm]
250	160	102	200	160	20	4637			

PACKAGING

Designation	Cardboard box	Cardboard box weight	Cardboard box Outside Deminsions	Pallets	Pallet weight	Pallet's external dimensions
	piece	kg	cm	piece	kg	cm
Reel K 250/102 with radius	18	25.5	68x44x71	240	328	106x129x177

Designation	Cardboard box	Cardboard box weight	Cardboard box Outside Deminsions	Pallets	Pallet weight	Pallet's external dimensions
	piece	kg	cm	piece	kg	cm

Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

TECHNICAL DRAWING

Spools

