

REEL 200/315

05 Spools with tapered barrel



Reusable

Winding material : Enamelled copper wire

Material : ABS

Standard winding volume : 5073 cm³

Central bore Ø : 100 mm

Catalogue categorization: 05

DIN EN 60264-3-1 Delivery spools with tapered barrel - Dimensions

DIN EN 60264-3-2 reusable spools with tapered barrel - Spezifikation

TECHNICAL DATA - SPOOLS

Spools

Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding- volume	Central bore Ø tapered part	Drive- hole/pin	Drive- distance
d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm ³]	d4 [mm]	d5 [mm]	E1 [mm]
200	112	100	315	265	25	5073	106	2 x 16	62.5

Container

Designation	Outer Ø	Overall height	Inner Ø bottom	Inner Ø top	
	d1 max	h1 max	d2	d3	h2 min
Container VB 200/315	265	400	215	236	40

Spool in container

Designation	Flange Ø bottom	Barrel Ø bottom	Flange Ø top	Barrel Ø top	Overall height	Winding width	Distance to surface	Flange thickness top
	d1	d2	d3	d4	L1	L2	t2	S1
Reel 200/315	200	125	190	112	315	265	7	25

PACKAGING


Designation	Cardboard box	Cardboard box weight	Cardboard box Outside Deminsions	Pallets	Pallet weight	Pallet's external dimensions
	piece	kg	cm	piece	kg	cm
Reel 200/315	16	22	68x44x71	150	199	100x120x172
Container VB 200/315	16	26.0	89x62x99	80	124	100x120x180

Important:

If pallet packaging is indicated, this is the preferred method of packing the spools. Please note that the pallets must not be stored in direct sunlight, as the heat build-up may cause the plastic to warp permanently.

TECHNICAL DRAWING

Spools

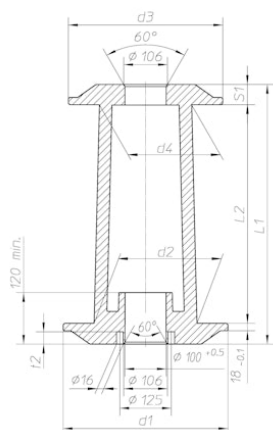

Container

